Preparation for test
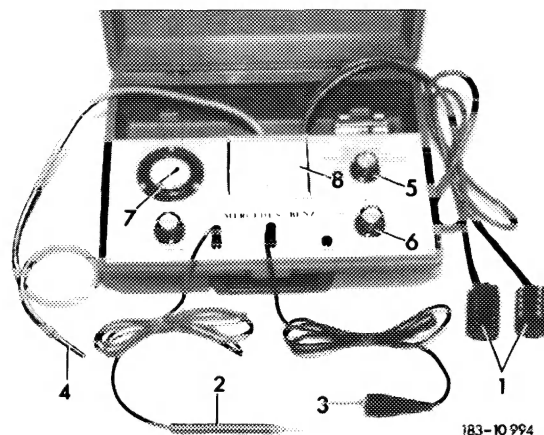
1   Remove cover at front right under instrument panel (68–150).

Connecting tester
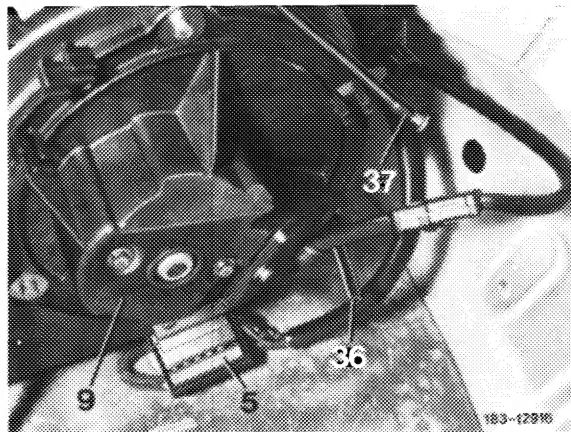
3   Connect vacuum line (4) to black vacuum line (37), while removing blind seal.

1	10-point plug connection	6	Mode switch
2	Volt or ohmmeter needle	7	Vacuum
3	Connection (vehicle ground)		measuring
4	Vacuum line		instrument
5	Voltmeter switch	8	Voltmeter

4   Connect the two 10-point plugs (1) of tester with plug connection (5).

5   Connect connection (3) of tester to vehicle ground (seat rail).

Layout of 10-point plug connection for tester

   5   10-point plug connection for tester
   9   Blower
  36   Vent line for legroom flaps
  37   Vacuum connection for tester